






- Dimensions and technical characteristics are not binding

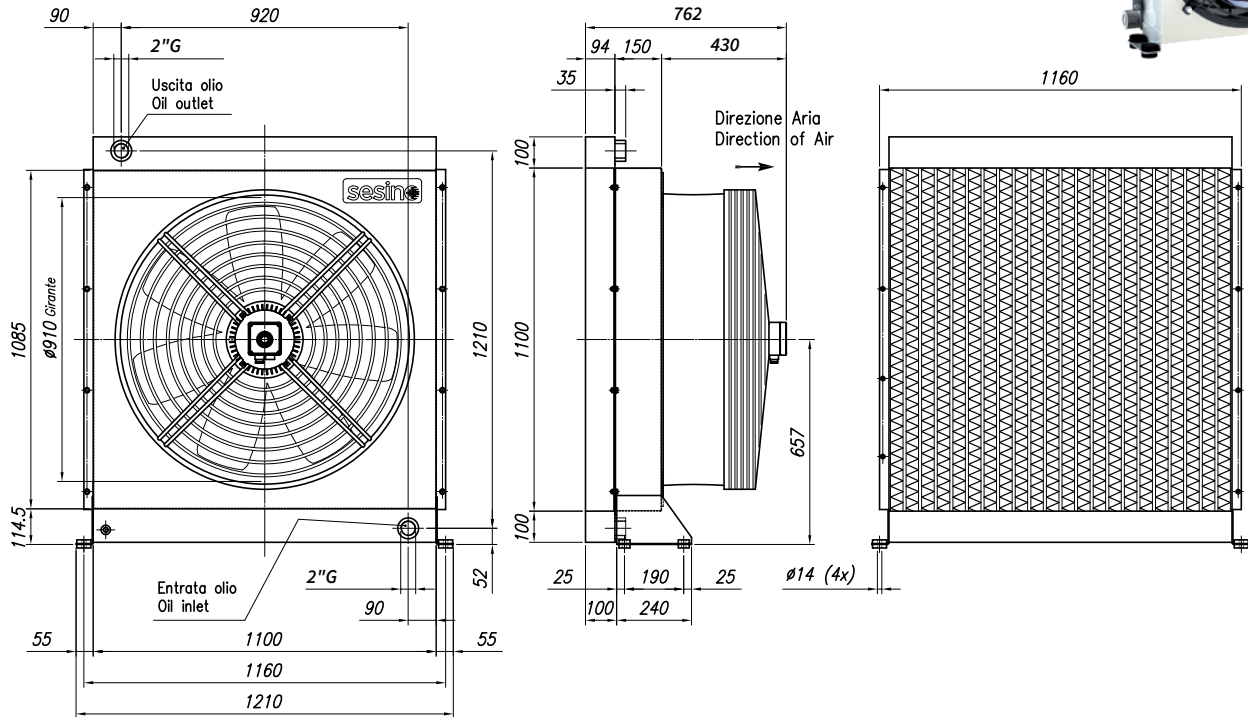

Static working pressure = 20 bar

Test pressure = 35 bar

| OIL FLOW | CAPACITY | VOLTAGE | FREQUENCY | POWER | CURRENT | AIR FLOW | PROTECTION | NOISE LEVEL | WEIGHT | φ FAN |
|----------|----------|---------|-----------|-----------|-------------------|-------------------|------------|-------------|--------|-------|
| l/min | l | V | hz | W | A | m ³ /h | IP | dB(A) | kg | mm |
| 250-150 | 35 | Δ-Y | 50 | 2414(Δ) / | 4,6(Δ) / 2,44 (Y) | 14.000 | 54 | 70 | 135 | 910 |

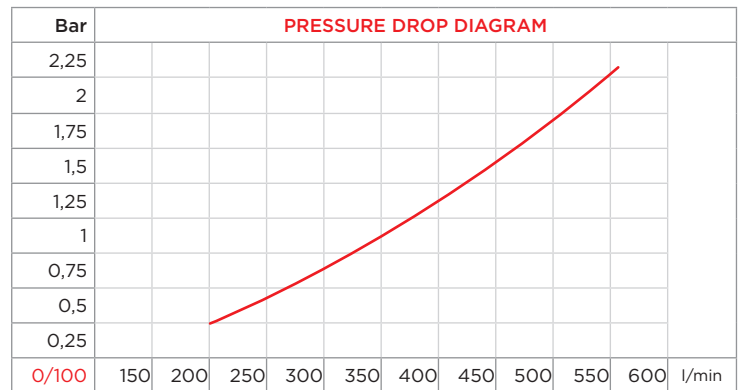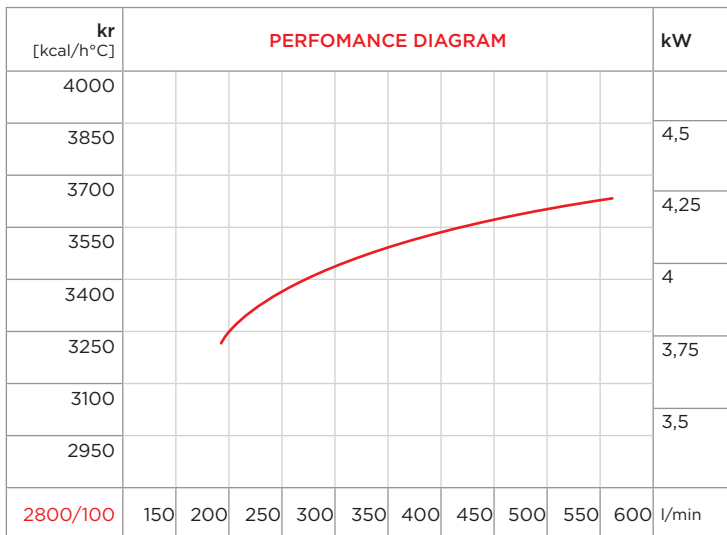

| CORRECTION FACTOR | | | | | | | |
|-------------------|-----|----|-----|-----|-----|-----|-----|
| cSt | 22 | 30 | 46 | 68 | 100 | 150 | 220 |
| f | 0,6 | 1 | 1,5 | 2,3 | 3,5 | 5 | 7 |

PURCHASE CODES

| | |
|------------------------|-------------------|
| AP 1200 EB three-phase | 3RAP1200EB |
|------------------------|-------------------|

SPARE PARTS

| | |
|----------------------------------|--------------|
| Frame | 3CNEO08586.1 |
| Shock isolating mounting (4 pcs) | 3KIT4232 |
| Cooling element | 1RO08423 |
| Electric fan | 1VNEO08586.2 |