
AP 2/680 EB

AC MOTOR AIR-OIL HEAT EXCHANGERS
SCAMBIATORI ARIA-OLIO CON VENTILATORE A CORRENTE ALTERNATA



- Dimensions and technical characteristics are not binding

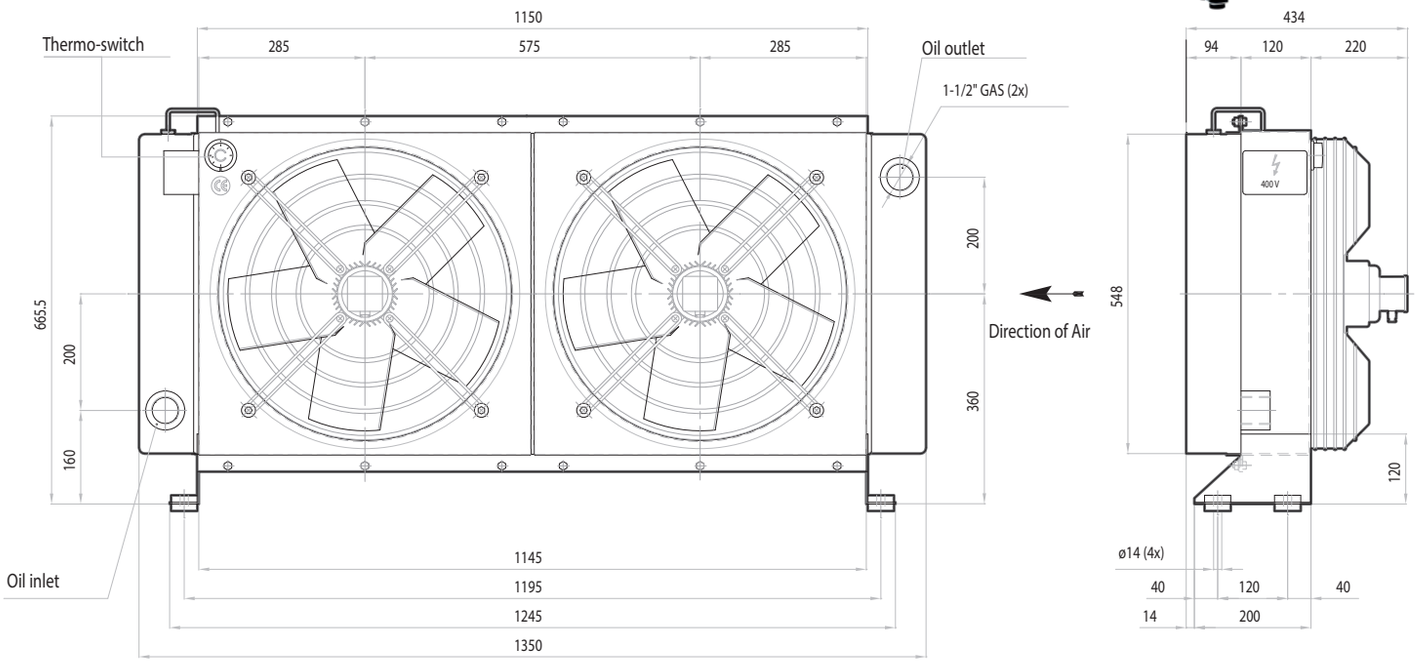

Static working pressure = 16 bar	Test pressure = 21 bar

OIL FLOW	CAPACITY	VOLTAGE	FREQUENCY	POWER	CURRENT	AIR FLOW	PROTECTION	NOISE LEVEL	WEIGHT	ø FAN
l/min	l	V	Hz	W	A	m³/h	IP	dB(A)	kg	mm
100-300	28	400/460	50/60	2x598/2x942	2x1,27/2x1,52	2x6.300	55	75	120	500

PERFOMANCE DIAGRAM

kr [kcal/h°C]	kW [kW/°C]
2100	
2025	2,37
1950	
1875	2,25
1800	
1725	2,12
1650	
1575	2
1500/0	1,87

50 100 150 200 250 300 350 400 l/min

PRESSURE DROP DIAGRAM

Bar
3
2,75
2,5
2,25
2
1,75
1,5
1,25
1
0,75
0,50
0,25
0

50 100 150 200 250 300 350 400 l/min

CORRECTION FACTOR

cSt	22	30	46	68	100	150	220
f	0,6	1	1,5	2,3	3,5	5	7

PURCHASE CODES

AP 2/680 EB three-phase	**3RAP2/680EB**

SPARE PARTS

Thermo-switch	1TRM0-90
Shock isolating mounting (4 pcs)	3KIT4232
Electric junction box for	1CSSDSAREL
Cooling element	1RO01339
Electric fan	1VNAP680DV
Frame	3CNAP2/680EB.1

sesino

COSTANTE SESINO SPA: via Monza, 150 A/B 20060 GESSATE (MI)
info@sesino.com - www.sesino.com | tel. +39 02.95.38.03.34