
AP 2/730 EB

AC MOTOR AIR-OIL HEAT EXCHANGERS
SCAMBIATORI ARIA-OLIO CON VENTILATORE A CORRENTE ALTERNATA



- Dimensions and technical characteristics are not binding

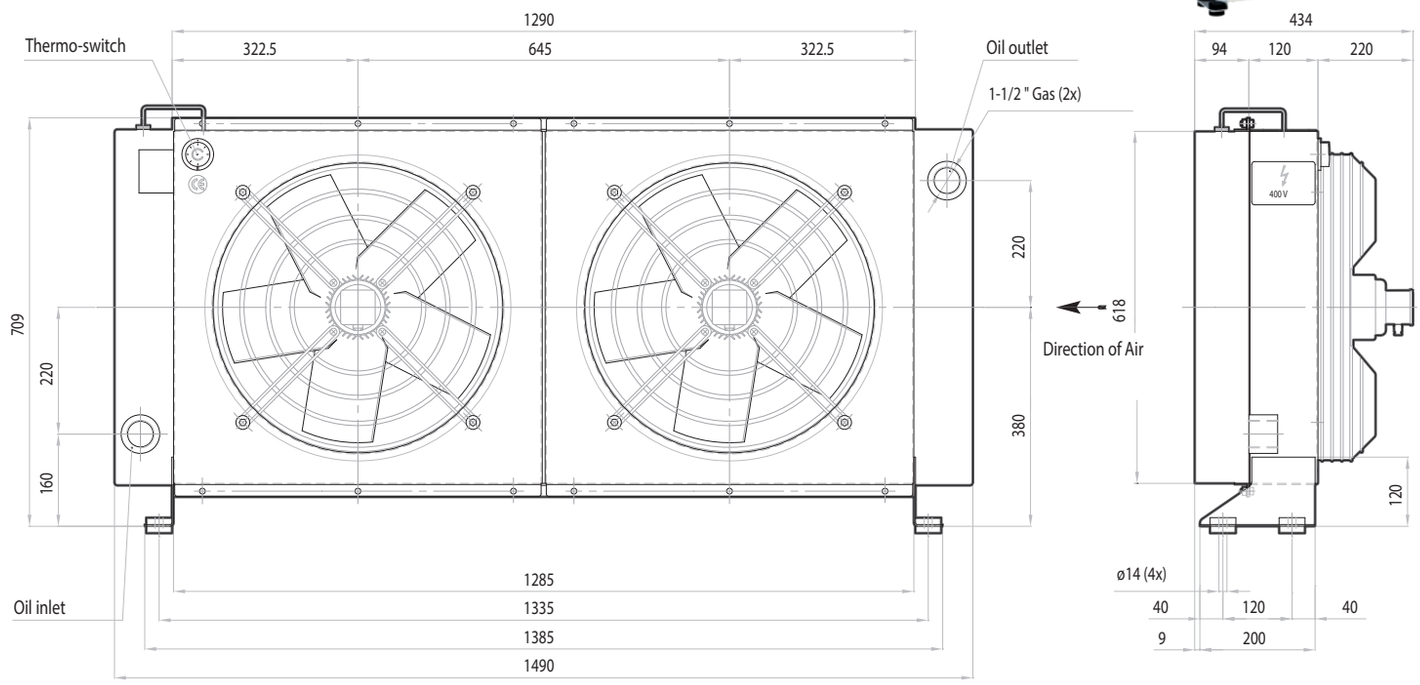

Static working pressure = 16 bar	Test pressure = 21 bar

OIL FLOW	CAPACITY	VOLTAGE	FREQUENCY	POWER	CURRENT	AIR FLOW	PROTECTION	NOISE LEVEL	WEIGHT	ø FAN
l/min	l	V	Hz	W	A	m³/h	IP	dB(A)	kg	mm
100-350	30	400/460	50/60	2x598/2x942	2x1,27/2x1,52	2x6.300	55	75	140	500

PERFOMANCE DIAGRAM

kr [kcal/h°C]	kW [kW/°C]
2750	
2650	
2550	3
2450	
2350	2,75
2250	
2150	2,5
2050	
1950	2,25

1850/0	50	100	150	200	250	300	350	400	l/min

PRESSURE DROP DIAGRAM

Bar	0	50	100	150	200	250	300	350	400	l/min
3,5										
3										
2,5										
2										
1,5										
1										
0,50										

CORRECTION FACTOR

cSt	22	30	46	68	100	150	220
f	0,6	1	1,5	2,3	3,5	5	7

PURCHASE CODES

AP 2/730 EB three-phase	**3RAP2/730EB**

SPARE PARTS

Thermo-switch	1TRM0-90
Shock isolating mounting (4 pcs)	3KIT4232
Electric junction box for	1CSSDSAREL
Cooling element	1RO02357
Electric fan	1VNAP680DV
Frame	3CNAP2/730EB.1

sesino

COSTANTE SESINO SPA: via Monza, 150 A/B 20060 GESSATE (MI)
info@sesino.com - www.sesino.com | tel. +39 02.95.38.03.34