
AP 2/730 I

AIR-OIL HEAT EXCHANGERS WITH IDRAULIC MOTOR
SCAMBIATORI ARIA-OLIO CON MOTORE IDRAULICO



- Dimensions and technical characteristics are not binding

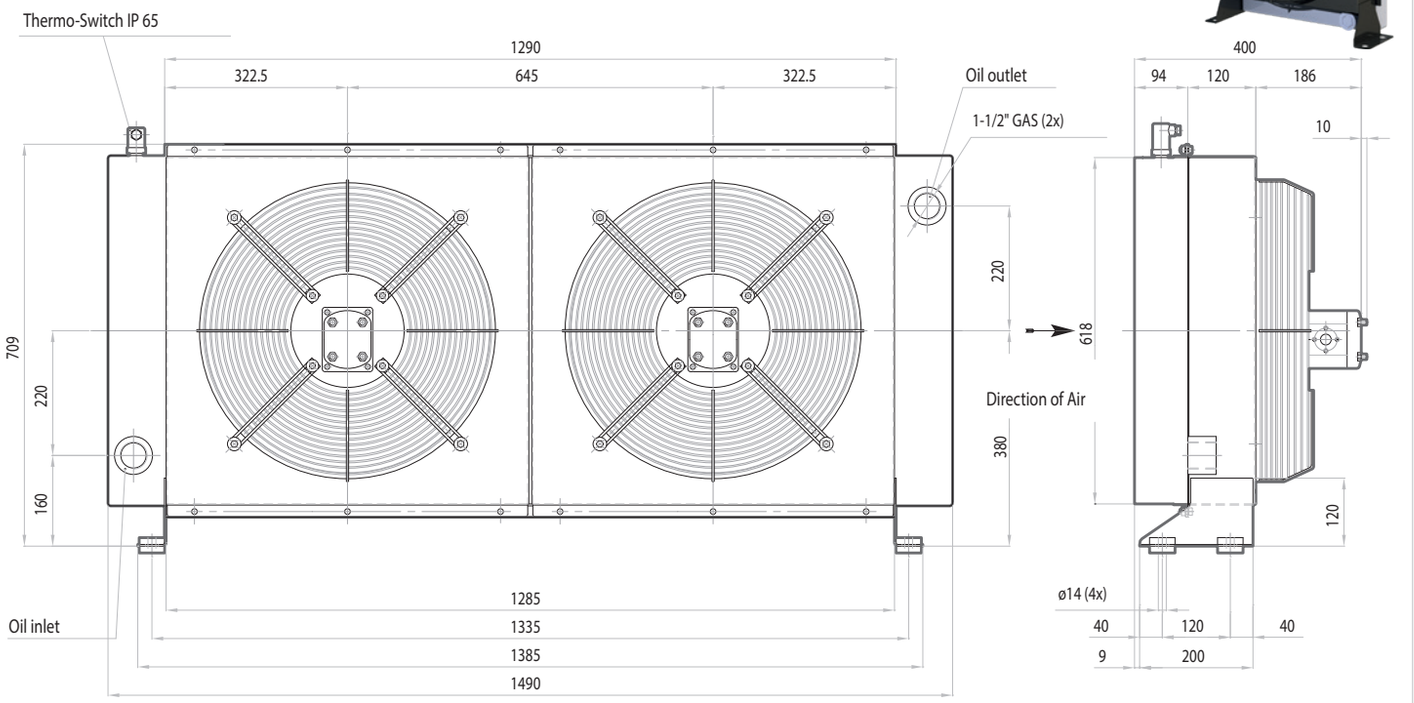

Static working pressure = 20 bar	Test pressure = 35 bar

OIL FLOW	FAN SPEED	POWER	DISPLACEMENT	MOTOR FLOW	AIR FLOW	NOISE LEVEL	WEIGHT	CAPACITY	ø FAN
l/min	rpm	W	cc/r	l/min	m³/h	dB(A)	kg	lt.	mm
100-350	1.450	2x1.000	2x11,3	2x17	2x12.000	82	120	30	2x600

PERFOMANCE DIAGRAM

kr [kcal/h°C]	kW [kW/°C]
3000	
2900	
2800	3,37
2700	3,25
2600	3,12
2500	3
2400	2,87
2300	2,75

2200/50	100	150	200	250	300	350	400	l/min

PRESSURE DROP DIAGRAM

Bar
3,5
3
2,5
2
1,5
1
0,5

0/50	100	150	200	250	300	350	400	l/min

CORRECTION FACTOR

cSt	22	30	46	68	100	150	220
f	0,6	1	1,5	2,3	3,5	5	7

PURCHASE CODES

AP 2/730 I with hydraulic motor	**3RAP2/730I1A**
AP 2/730 I prepared	**3RAP2/730I4A**

SPARE PARTS

Frame	3CNAP2/730I.1
Shock isolating mounting (4 pcs)	3KIT4232
Electric junction box	1CSSDSAREL
Cooling element	1RO02357
Fan	1G50010340PAV
Hydraulic motor	1MO2/M16
Thermo-switch 60-49 IP 65	1TRM60-49
Thermo-switch 47-36 IP 65	1TRM47-36
Fan Grill	1RTAP680I

sesino

COSTANTE SESINO SPA: via Monza, 150 A/B 20060 GESSATE (MI)
info@sesino.com - www.sesino.com | tel. +39 02.95.38.03.34