


AP 300 EM

AIR-OIL HEAT EXCHANGERS MARINE USE EM TYPE
SCAMBIATORI ARIA-OLIO CON VENTILATORE AC USO MARINO SERIE EM





- Dimensions and technical characteristics are not binding

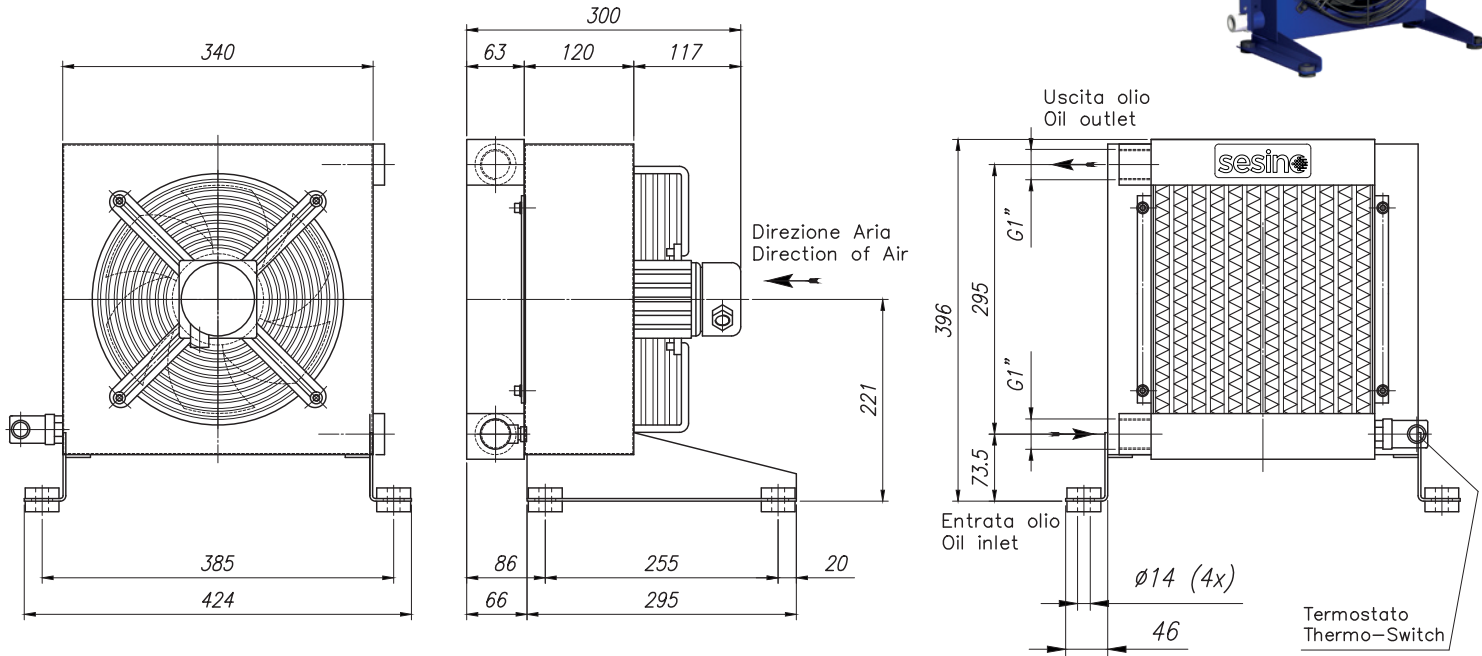

Static working pressure = 20 bar Test pressure = 35 bar

CODE	OIL FLOW l/min	CAP. l	VOLT. V	FREQ. Hz	POWER W	CURRENT A	AIR FLOW m³/h	PROT. IP	NOISE LEV. dB(A)	W kg	ø FAN mm	TEMP. °C
3RAP300EM50ST	10-80	2	220-240(Δ) / 380-415 (Y)	50	180	0,4	1500	56	73	12	250	-20/+40
3RAP300EM60ST	10-80	2	460 (Y)	60	285	0,6	1580	56	73	12	250	-20/+40

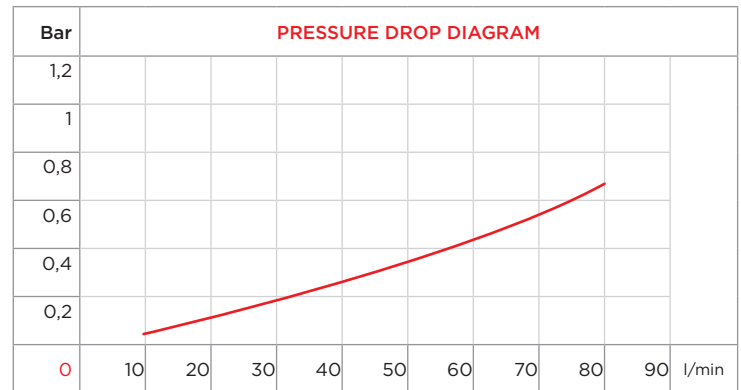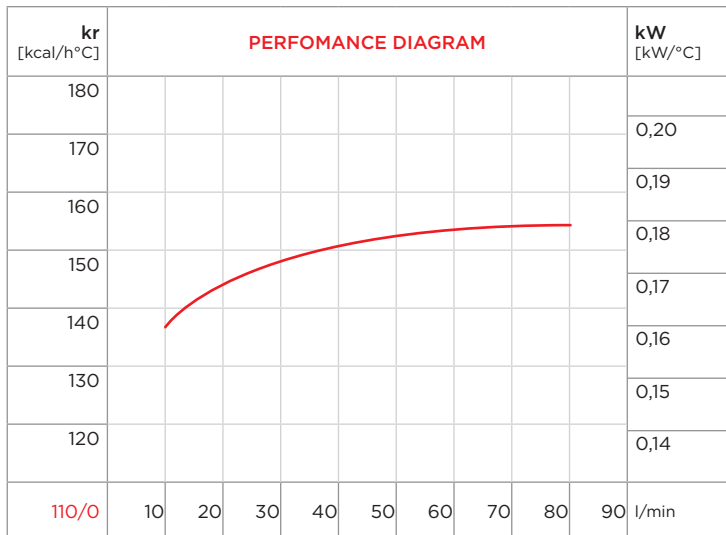

CORRECTION FACTOR							
cSt	22	30	46	68	100	150	220
f	0,6	1	1,5	2,3	3,5	5	7

PURCHASE CODES

AP 300 EM three-phase 380-415V 50Hz with thermo-switch	3RAP300EM50T247 3RA-P300EM50T260
AP 300 EM three-phase 460V 60 Hz with thermo-switch	3RAP300EM60T247 3RA-P300EM60T260
AP 300 EM three-phase 380-415V 50Hz without thermo-switch	3RAP300EM50ST
AP 300 EM three-phase 460V 60 Hz without thermo-switch	3RAP300EM60ST

SPARE PARTS

Cooling element	3RNL300A
Frame	3CNAP300EM.1
Electric fan 380-415V 50Hz	1VNAP300EM50
Electric fan 460V 60 Hz	1VNAP300EM60
Thermo-switch 47-36	1TRM 47-36
Thermo-switch 60-49	1TRM 60-49