






- Dimensions and technical characteristics are not binding

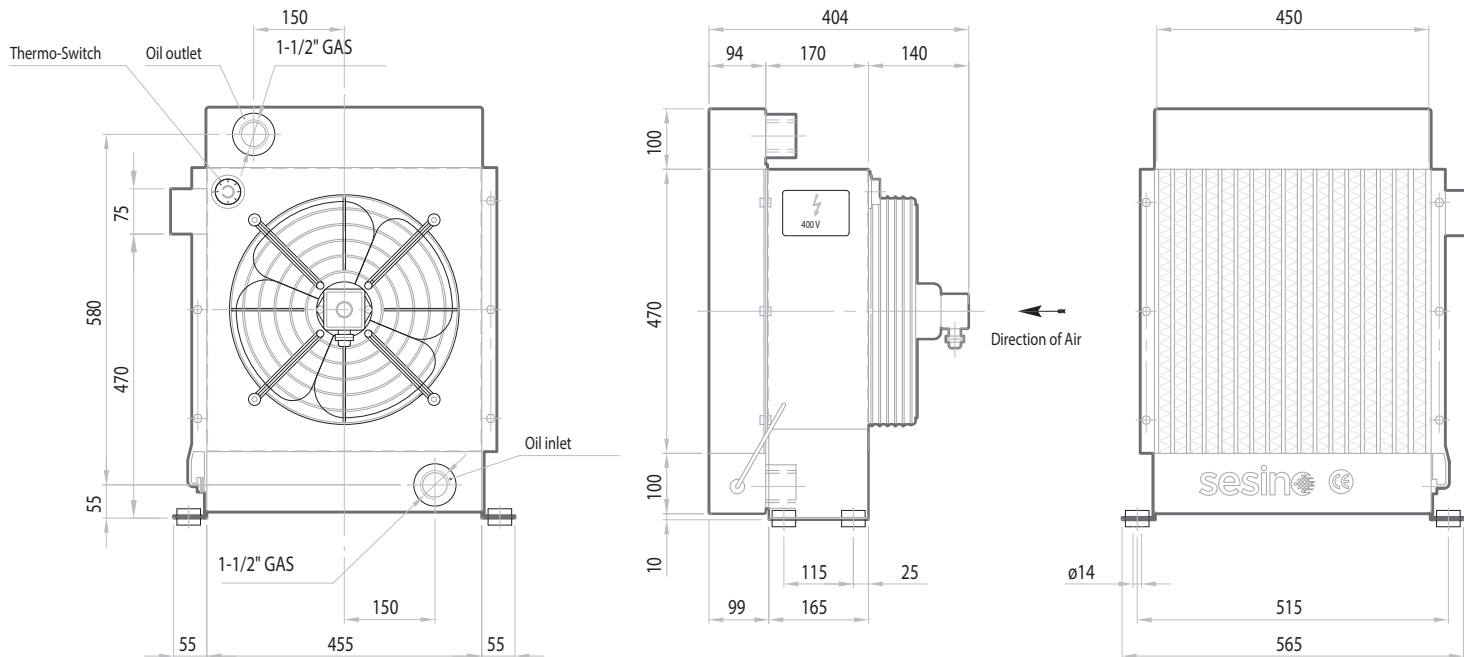

Static working pressure = 20 bar

Test pressure = 35 bar

OIL FLOW	CAPACITY	VOLTAGE	FREQUENCY	POWER	CURRENT	AIR FLOW	PROTECTION	NOISE LEVEL	WEIGHT	ø FAN
l/min	l	V	hz	W	A	m ³ /h	IP	dB(A)	kg	mm
100-250	11,5	Δ 230 Y 400	50	95/190	0,60/0,35	3.500	55	72	40	400
100-250	11,5	Δ 265 Y 480	60	130/250	0,69/0,40	4.800	55	72	40	400

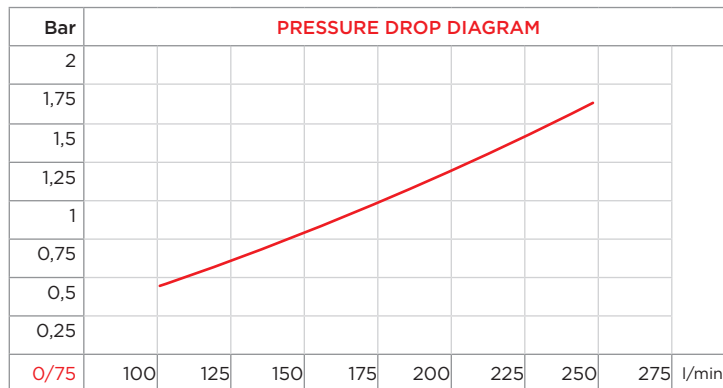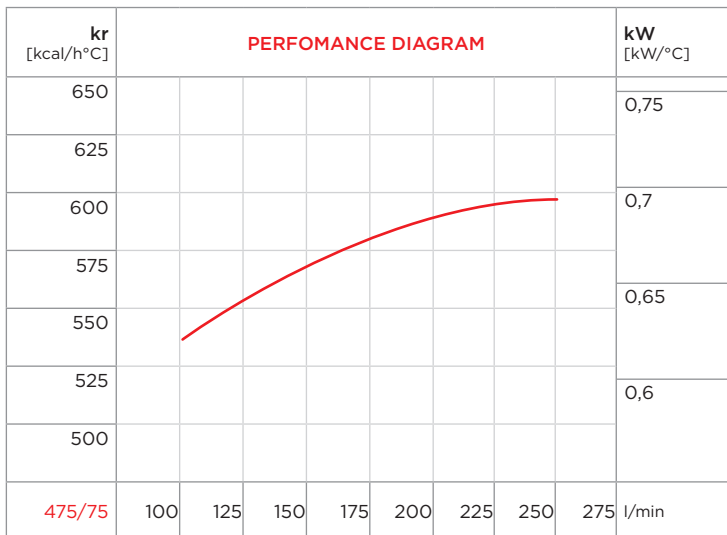

CORRECTION FACTOR							
cSt	22	30	46	68	100	150	220
f	0,6	1	1,5	2,3	3,5	5	7

PURCHASE CODES

AP 580 EB three-phase	3RAP580EB
-----------------------	------------------

SPARE PARTS

Adjustable thermo-switch	1TRMO-90
Shock isolating mounting (4 pcs)	3KIT4135
Electric junction box for	1CSSDSAREL
Cooling element	3RNAP580E
Electric fan	1VNELCO4328DV2
Frame	3CNAP580EB.1