

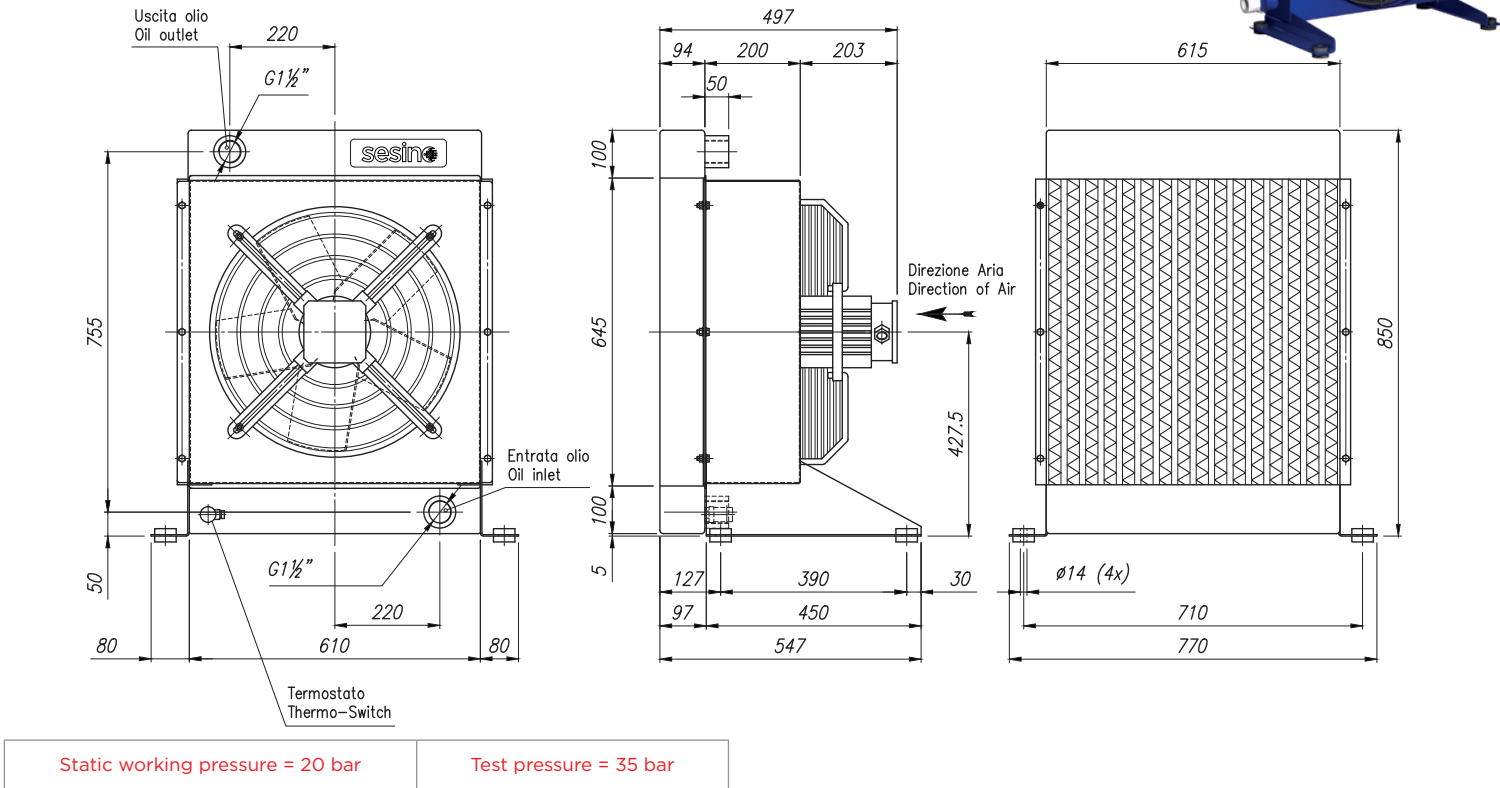


- Dimensions and technical characteristics are not binding

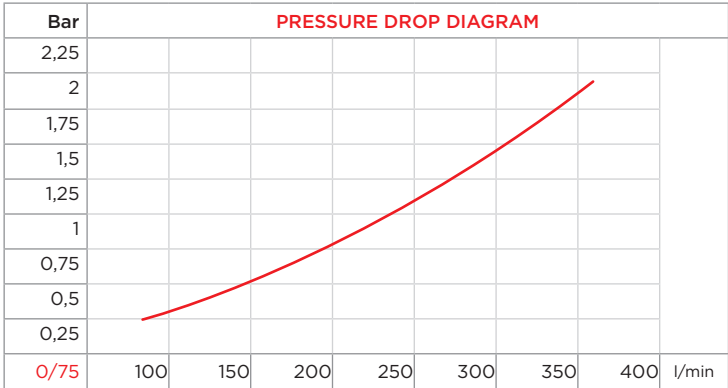

CODE	OIL FLOW	CAP.	VOLT.	FREQ.	POWER	CURRENT	AIR FLOW	PROT.	NOISE LEV.	WEIGHT	ø FAN	TEMP.
	l/min	l	V	Hz	W	A	m³/h	IP	dB(A)	kg	mm	°C
3RAP730EM50ST	100-350	16	220-240(Δ) / 380-415	50	725	1,34	7800	56	75	78	500	-20/+40
3RAP730EM60ST	100-350	16	460 (Y)	60	816	1,27	8200	56	75	78	500	-20/+40

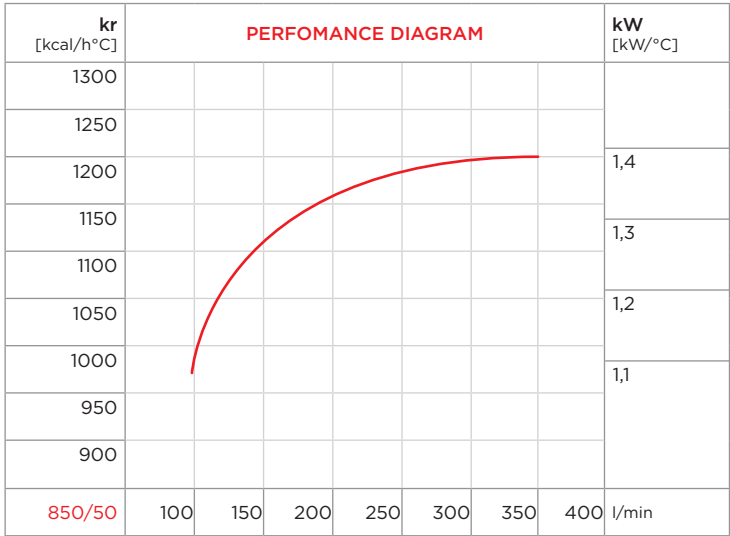

CORRECTION FACTOR							
cSt	22	30	46	68	100	150	220
f	0,6	1	1,5	2,3	3,5	5	7

PURCHASE CODES

AP 730 EM three-phase 380-415V 50Hz with thermo-switch	3RAP730EM50T247 3RAP730EM50T260
AP 730 EM three-phase 460V 60 Hz with thermo-switch	3RAP730EM60T247 3RAP730EM60T260
AP 730 EM three-phase 380-415V 50Hz without thermo-switch	3RAP730EM50ST
AP 730 EM three-phase 460V 60 Hz without thermo-switch	3RAP730EM60ST

SPARE PARTS

Cooling element	3RNL730A
Frame	3CNAP730EM.1
Electric fan 380-415V 50Hz	1VNAP680EM50
Electric fan 460V 60 Hz	1VNAP680EM60
Thermo-switch 47-36	1TRM 47-36
Thermo-switch 60-49	1TRM 60-49