




MS 352 P

- Dimensions and technical characteristics are not binding

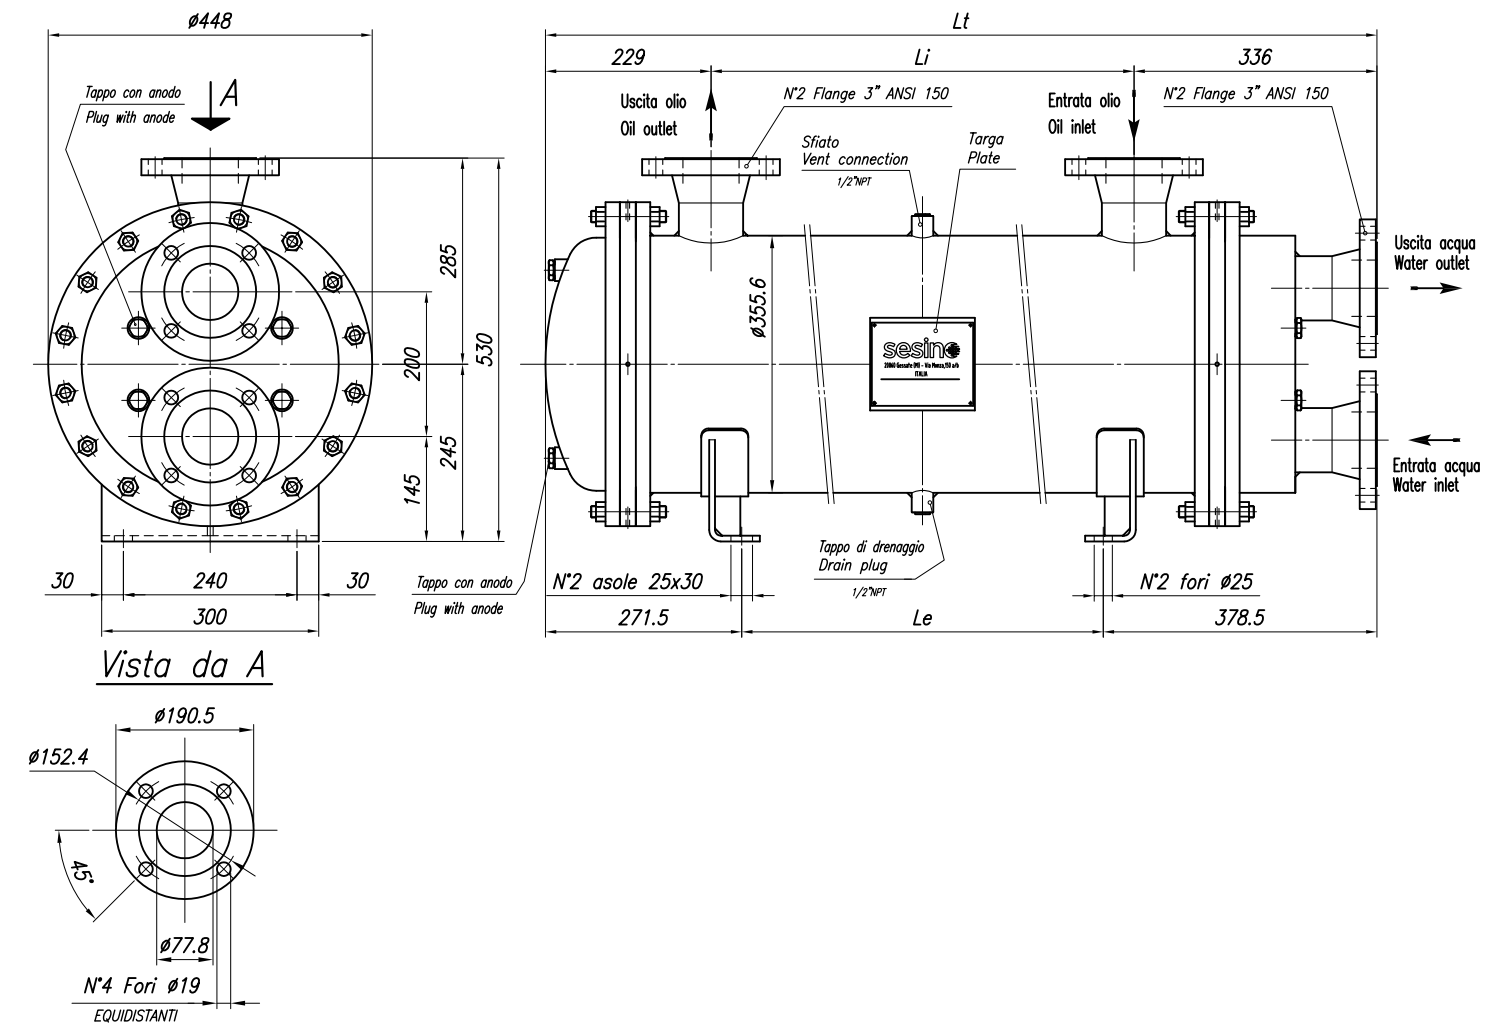


Static working pressure = 12 bar	Test pressure = 15 bar
----------------------------------	------------------------

TYPE	CODE	OIL FLOW	WATER FLOW	kW MIN water flow		kW MAX water flow		WEIGHT	DIMENSIONS		
		l/min	l/min	ΔTm 25° C		ΔTm 25° C		kg	Li	Le	Lt
MS 352 P1	2SC352P1	300-600	292-1166	117	180	148	258	400	985	900	1550
MS 352 P2	2SC352P2	400-700	292-1166	202	278	261	360	460	1280	1195	1845
MS 352 P3	2SC352P3	500-800	292-1166	247	310	333	415	525	1600	1515	2165
MS 352 P4	2SC352P4	300-680	292-1166	214	328	273	451	577	1845	1760	2410
MS 352 P5	2SC352P5	300-680	292-1166	232	370	295	513	640	2140	2055	2705

CONSTRUCTION MATERIALS		
SHELL	TUBES	END COVERS
CARBON STEEL*	COPPER*	CAST IRON*
STAINLESS STEEL AISI 304	STAINLESS STEEL AISI 304	STAINLESS STEEL AISI 304
CARBON STEEL	CuNi (water sea)	BRONZE

*standard




WATER-OIL HEAT EXCHANGERS WITH TUBE BUNDLE
SCAMBIATORI ACQUA-OLIO A FASCIO TUBIERO ESTRAIBILE





WATER FLOW RATE:





P1 P2

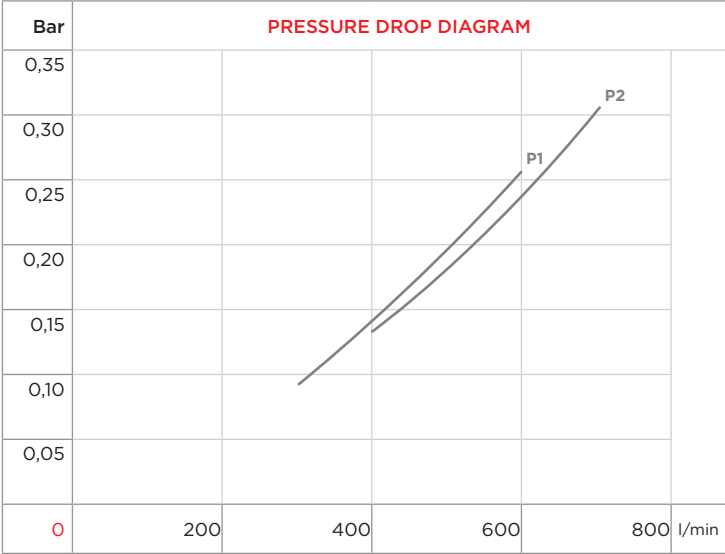

P3 P4

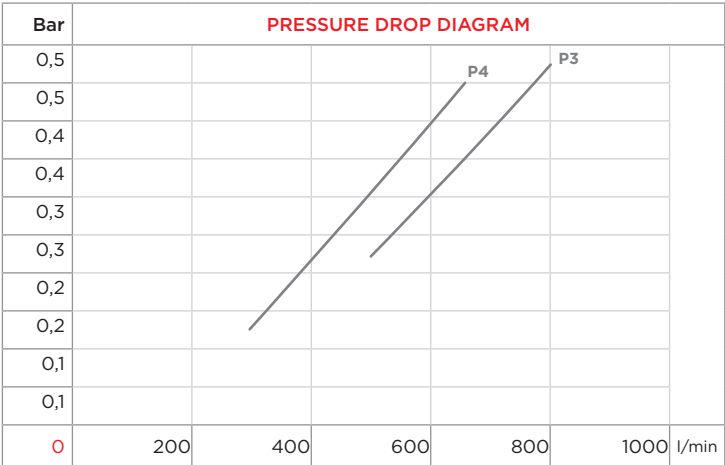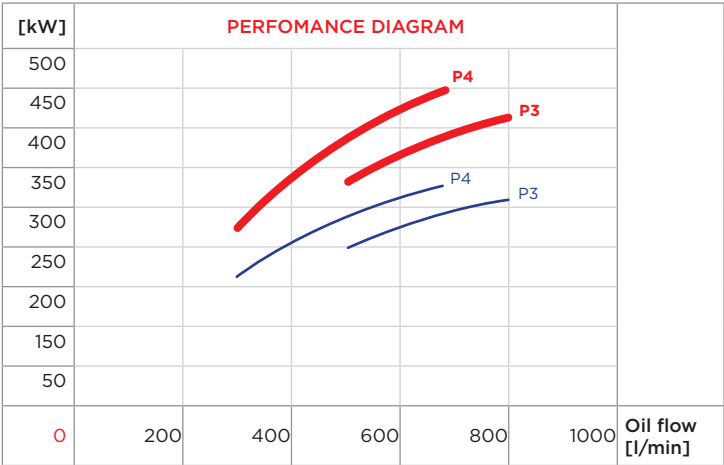

P5

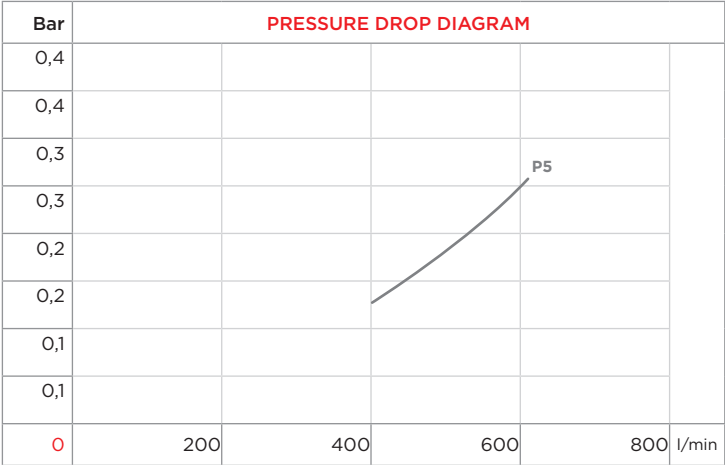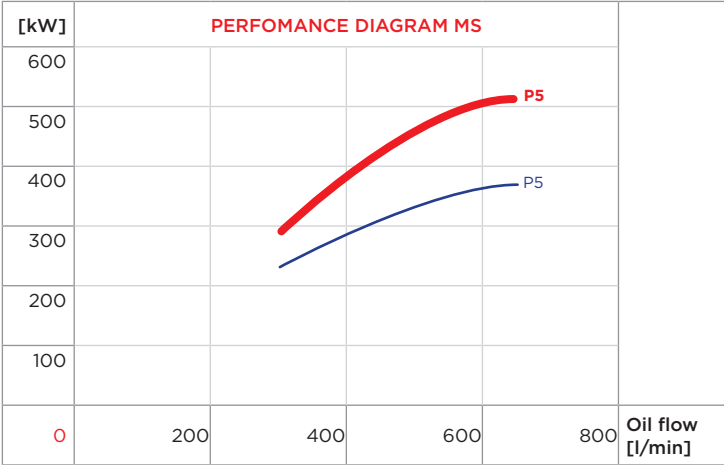

CORRECTION FACTOR							
ΔTm	10	15	20	25	30	35	40
f	2,5	1,67	1,25	1	0,83	0,71	0,63

CORRECTION FACTOR							
cSt	22	30	46	68	100	150	220
f	0,4	0,6	1	1,5	2,3	3,3	4,6