


AP 580 I

AIR-OIL HEAT EXCHANGERS WITH IDRAULIC MOTOR
SCAMBIATORI ARIA-OLIO CON MOTORE IDRAULICO





- Dimensions and technical characteristics are not binding

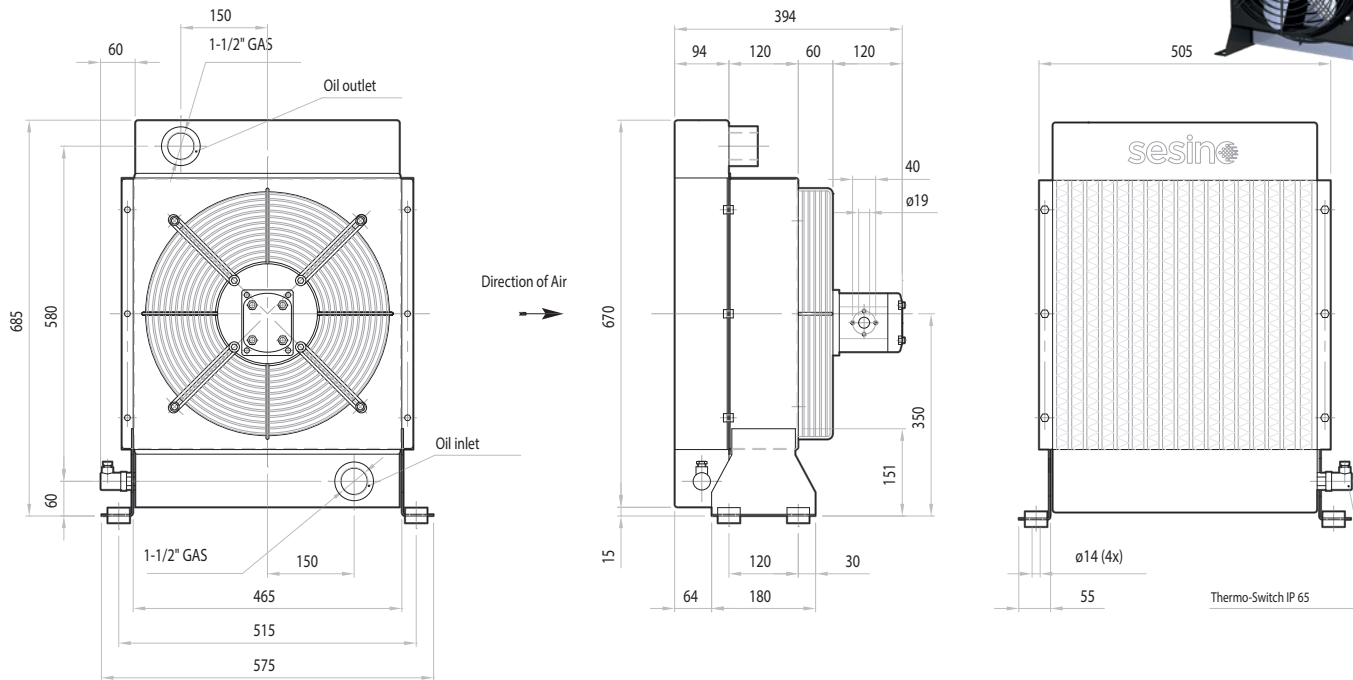

Static working pressure = 20 bar

Test pressure = 35 bar

OIL FLOW	FAN SPEED	POWER	DISPLACEMENT	MOTOR FLOW	AIR FLOW	NOISE LEVEL	WEIGHT	CAPACITY	ø FAN
l/min	rpm	W	cc/r	l/min	m ³ /h	dB(A)	kg	lt.	mm
100-250	2.250	880	11,3	26	8.000	78	38	11,5	400

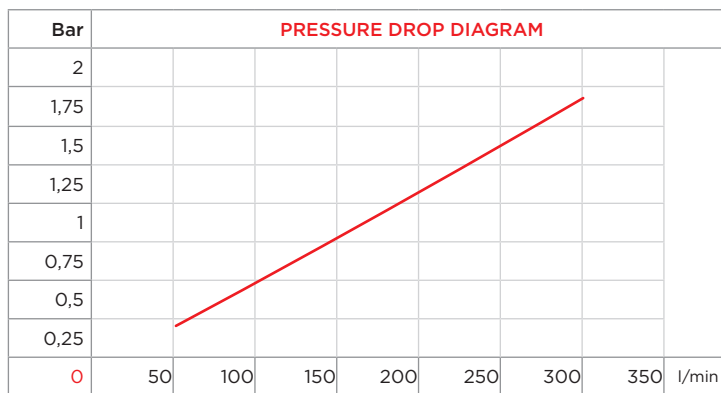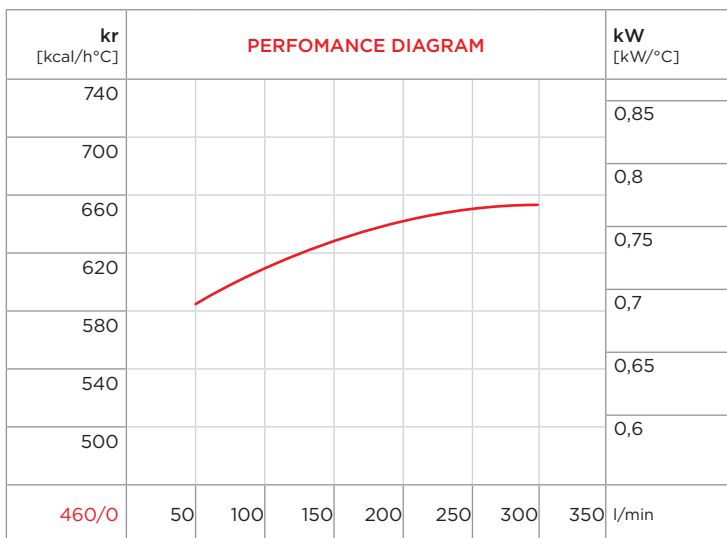

cSt	22	30	46	68	100	150	220
f	0,6	1	1,5	2,3	3,5	5	7

PURCHASE CODES

AP 580 I with hydraulic motor	3RAP580I1A
AP 580 I with hydraulic motor	3RAP580I4A

SPARE PARTS

Frame	3CNAP580.1
Shock isolating mounting (4 pcs)	3KIT4135
Cooling element	3RNL580
Fan	1G40010345PAV
Hydraulic motor	1MO2/M16
Thermo-switch 60-49 IP 65	1TRM60-49
Thermo-switch 47-36 IP 65	1TRM47-36
Fan Grill	1RTAP580I