



- Dimensions and technical characteristics are not binding

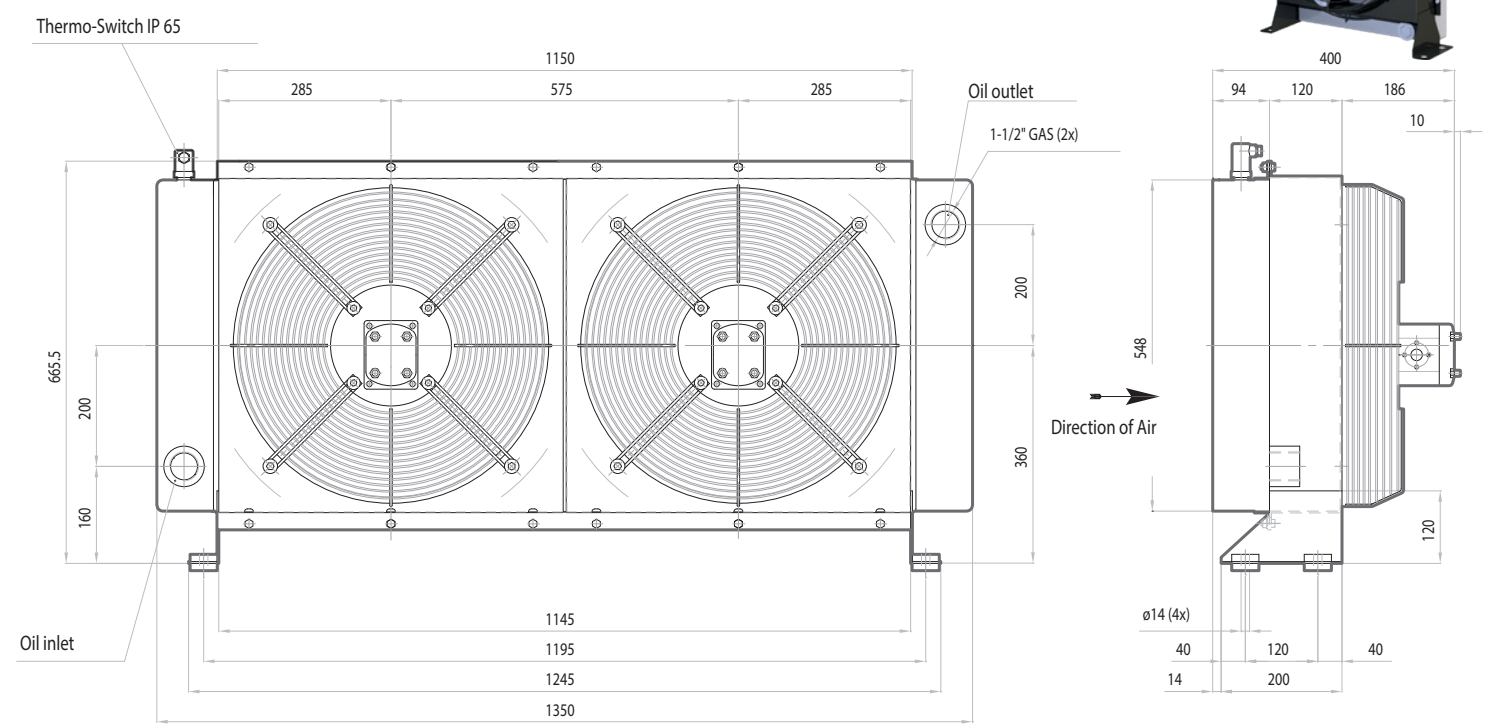


Static working pressure = 20 bar	Test pressure = 35 bar
----------------------------------	------------------------

OIL FLOW	FAN SPEED	POWER	DISPLACEMENT	MOTOR FLOW	AIR FLOW	NOISE LEVEL	WEIGHT	CAPACITY	ø FAN
l/min	rpm	W	cc/r	l/min	m³/h	dB(A)	kg	lt.	mm
100-300	2x1.450	2x750	2x11,3	2x17	2x10.000	82	100	28	2x500

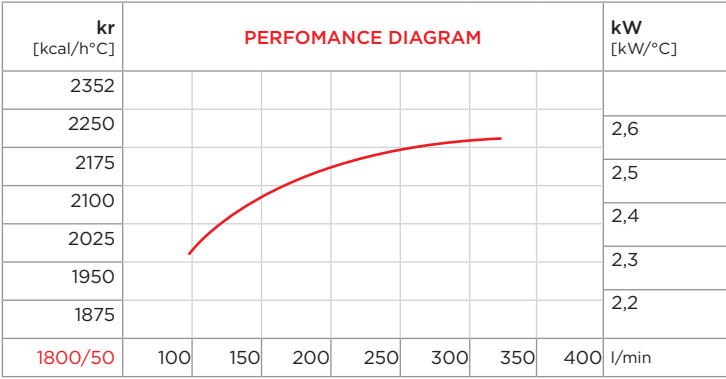

CORRECTION FACTOR								
cSt	22	30	46	68	100	150	220	
f	0,6	1	1,5	2,3	3,5	5	7	

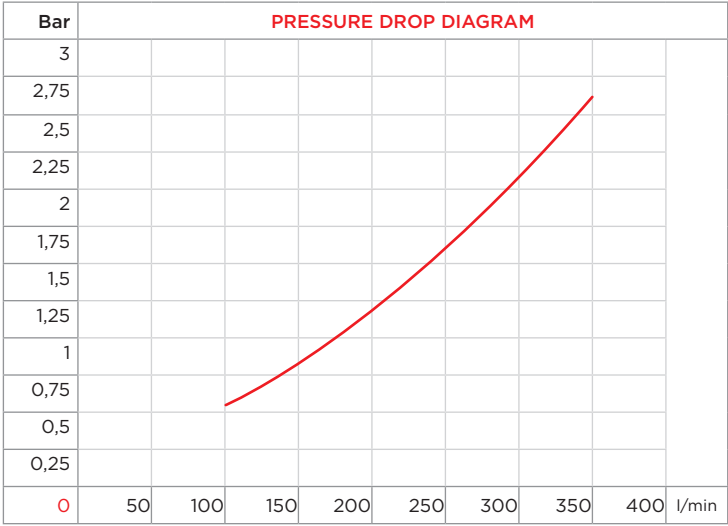

PURCHASE CODES

AP 2/680 I with hydraulic motor	3RAP2/680I1A
AP 2/680 I prepared	3RAP2/680I4A

SPARE PARTS

Frame	3CNAP2/680O.1
Shock isolating mounting (4 pcs)	3KIT4232
Electric junction box	1CSSDSAREL
Cooling element	1RO01339
Fan	1G3506345PAV
Hydraulic motor	1MO2/M16
Thermo-switch 60-49 IP 65	1TRM60-49
Thermo-switch 47-36 IP 65	1TRM47-36
Fan Grill	1RTAP680I