
AP 3/830 EMX

AC MOTOR AIR-OIL HEAT EXCHANGERS
MARINE USE AND ATEX REGULATION EMX TYPE
SCAMBIATORI DI CALORE ARIA OLIO CON VENTILATORE A CORRENTE ALTERNATA USO MARINO NORME ATEX SERIE EMX





- Dimensions and technical characteristics are not binding
- Static working pressure = 20 bar
- Test pressure = 35 bar

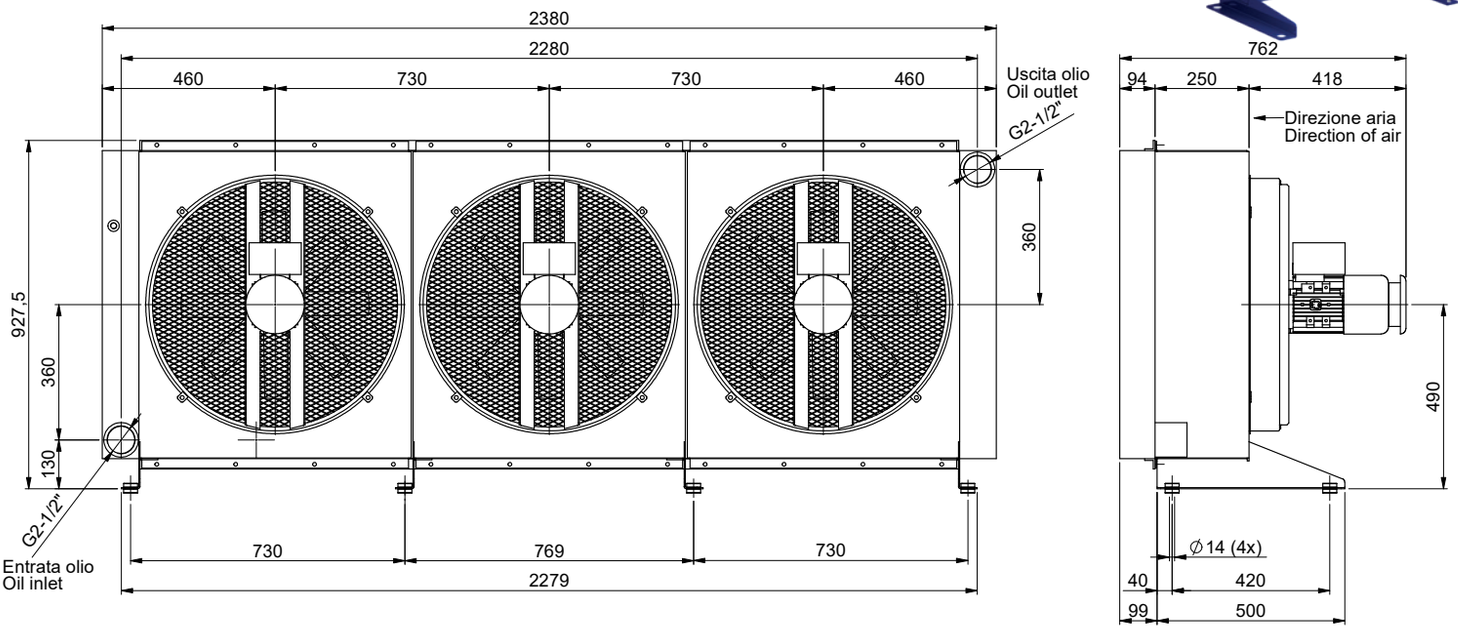

Static working pressure = 20 bar	Test pressure = 35 bar

CODE	OIL FLOW	CAP.	VOLT.	FREQ.	POWER	CURRENT	AIR FLOW	PROT.	NOISE LEV.	WEIGHT	ø FAN	TEMP.
	l/min	l	V	Hz	W	A	m³/h	IP	dB(A)	kg	mm	°C
3RAP3/830EMX50	150-400	60	220-240(Δ) / 380-415	50	3x 1100	3x 2,58	2x 10000	56	90	360	560	-20/+40
	150-400	60	460 (Y)	60	3x 1100	3x 2,24	2x 10600	56	91	360	560	-20/+40

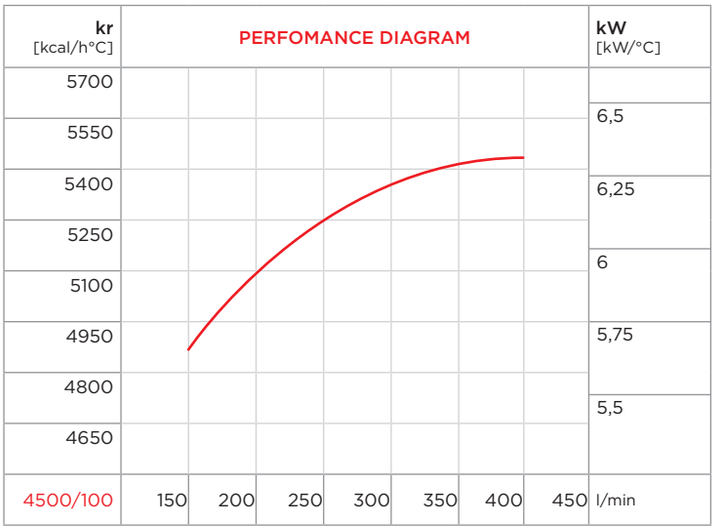

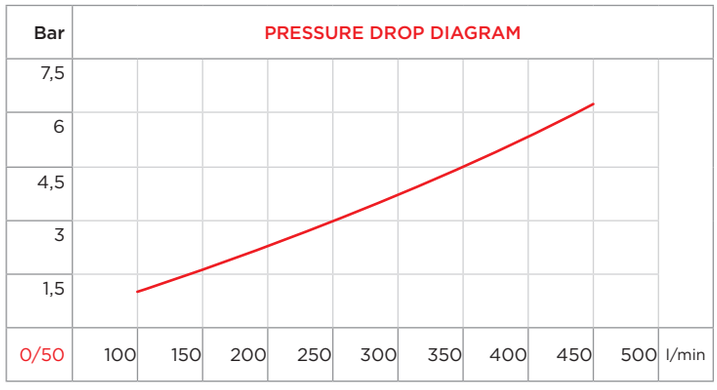

CORRECTION FACTOR							
cSt	22	30	46	68	100	150	220
f	0,6	1	1,5	2,3	3,5	5	7

PURCHASE CODES

AP 3/830 EMX three-phase 380-415V 50Hz	3RAP3/830EMX50
AP 3/830 EMX three-phase 460V 60HZ	3RAP3/830EMX60

SPARE PARTS

Cooling element	3RNL3/830A
Frame	3CNAP3/830EMX.1
Electric fan 380-415V 50Hz	1VNAP830EMX50
Electric fan 460V 60Hz	1VNAP830EMX60

sesino

COSTANTE SESINO SPA: via Monza, 150 A/B 20060 GESSATE (MI)
info@sesino.com - www.sesino.com | tel. +39 02.95.38.03.34