
AP 680 I

AIR-OIL HEAT EXCHANGERS WITH IDRAULIC MOTOR
SCAMBIATORI ARIA-OLIO CON MOTORE IDRAULICO





- Dimensions and technical characteristics are not binding

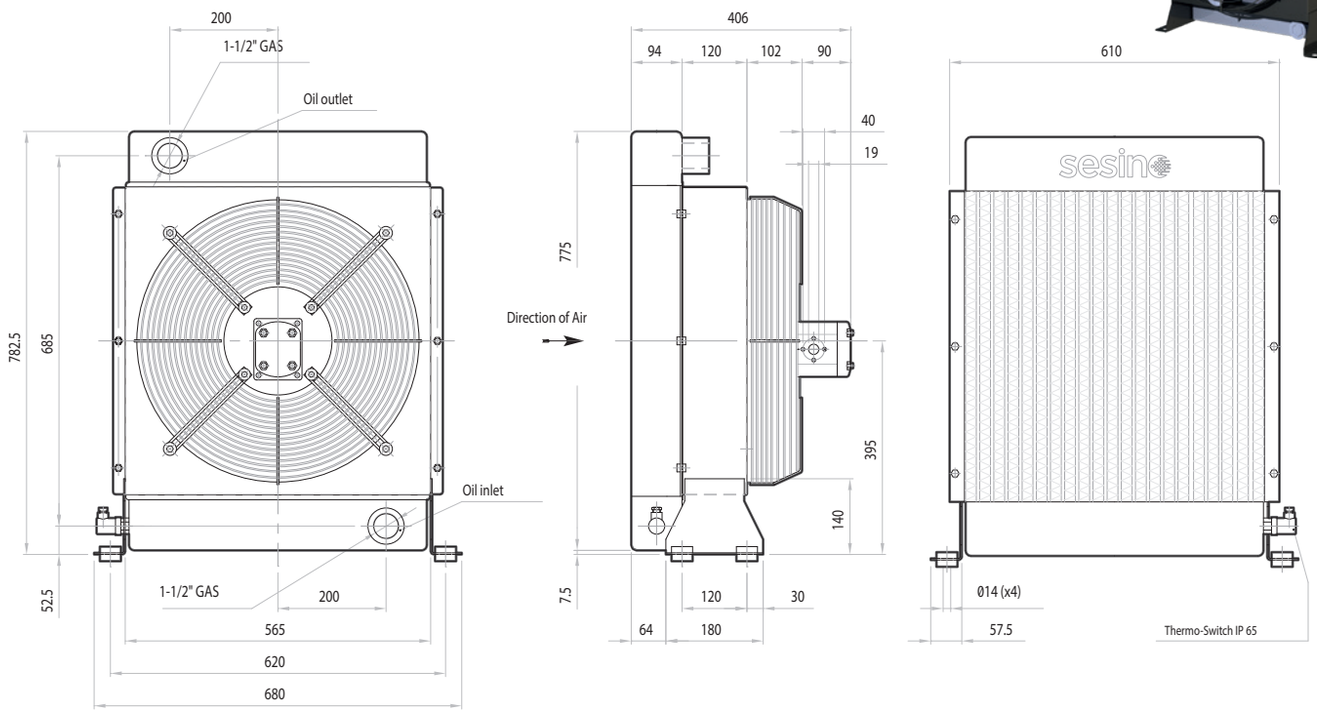

Static working pressure = 20 bar	Test pressure = 35 bar

OIL FLOW	FAN SPEED	POWER	DISPLACEMENT	MOTOR FLOW	AIR FLOW	NOISE LEVEL	WEIGHT	CAPACITY	ø FAN
l/min	rpm	W	cc/r	l/min	m³/h	dB(A)	kg	lt.	mm
100-300	1.450	750	11,3	17	10.000	80	48	15	500

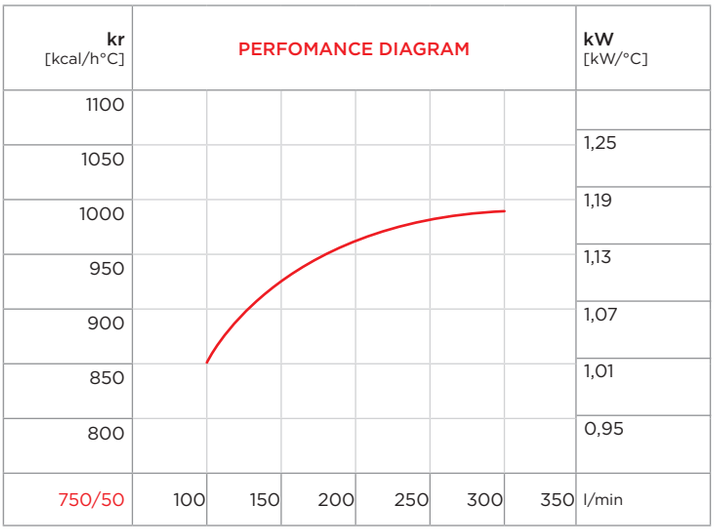

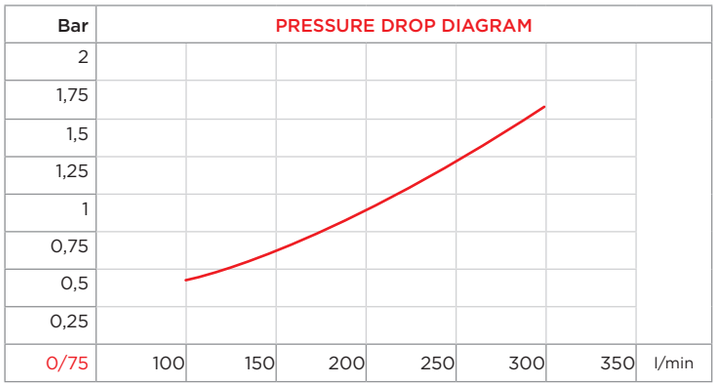

CORRECTION FACTOR							
cSt	22	30	46	68	100	150	220
f	0,6	1	1,5	2,3	3,5	5	7

PURCHASE CODES

AP 680 I with hydraulic motor	**3RAP680I1A**
AP 680 I prepared	**3RAP680I4A**

SPARE PARTS

Frame	3CNAP680.1
Shock isolating mounting (4 pcs)	3KIT4135
Cooling element	3RNAP680E
Hydraulic motor	1MO2/M16
Fan	1G50010340PAV
Thermo-switch 60-49 IP 65	1TRM60-49
Thermo-switch 47-36 IP 65	1TRM47-36
Fan Grill	1RTAP680I

sesino

COSTANTE SESINO SPA: via Monza, 150 A/B 20060 GESSATE (MI)
info@sesino.com - www.sesino.com | tel. +39 02.95.38.03.34